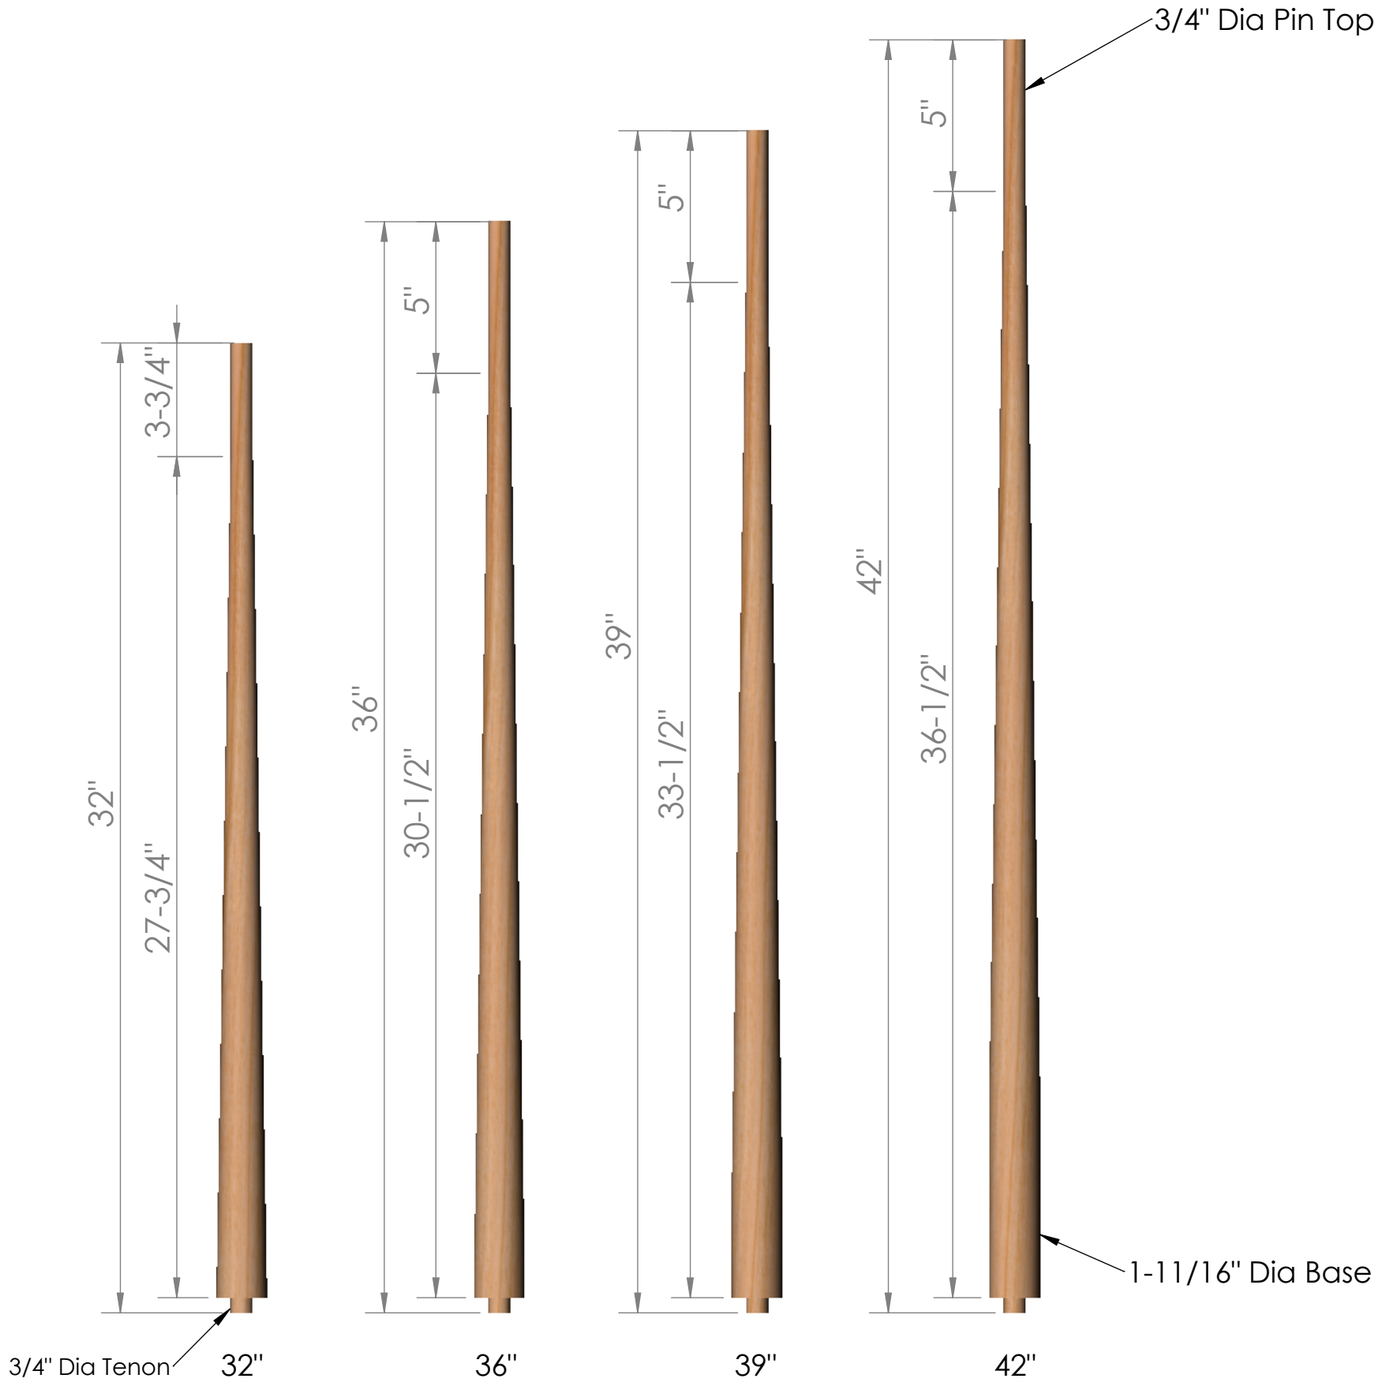


Rake Alinged Balusters

Based off a 7-1/2" Rise and 10" Run

For kneewall applications use 32" balusters

When using two balusters per tread
on an open stair with a 34" handrail height
use 36" and 39" balusters

When using 3 balusters per tread on
a open stair with a 34" handrail height
use 36", 39" and 42" balusters.

For 36" balconies use 36" balusters for 37"-39"
balconies use 39" balusters and for 40"- 42"
balconies use 42" balusters

Handrail Fittings

Start Easing use 42" balusters

Turnout and Volute use 42" balusters

TITLE: K5340 -1-3/4" Round Tapered Balusters

PART # K5340

THIS DRAWING IS THE SOLE PROPERTY OF KINZEL WOOD PRODUCTS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KINZEL WOOD PRODUCTS LLC IS PROHIBITED.

KINZEL WOOD PRODUCTS LLC